


Landscape Light Series



	HT111W01	HT111W02	HT111W03
Light Source Power	LED 3x1W	LED 3x3W	LED 3x2W
Max Power	4.5W	12W	8W
CCT	Warm/Cool White/Neutral/ & RGB	Warm/Cool White/Neutral/ & RGB	Warm/Cool White/Neutral/ & RGB
Lumen	170Lm(3000K)	600Lm(3000K)	420Lm(3000K)
CRI	170Lm(3000K)	Ra≥75	Ra≥75
Beam angle	30°/45°/60°	30°/45°/60°	30°/45°/60°
Adjustable	Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Light Source	Epistar LED Chip	Epistar LED Chip	Epistar LED Chip



Dimension:

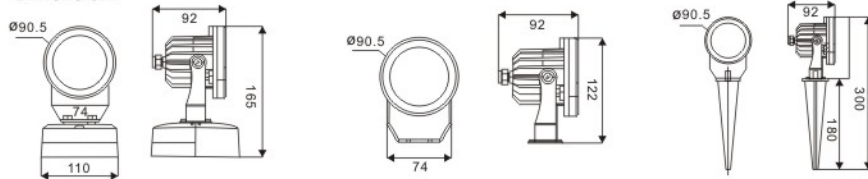

Structure: High pressure die cast aluminum housing. 3mm thickness tempered glass. Optical lens. Silicon waterproof gasket. 304 stainless steel external screw. Remote / Intergral driver.





	HT211W01	HT211W02
Light Source Power	LED 9x1W	LED 9x2W
Max Power	12W	20W
CCT	Warm/Cool White/Neutral/ & RGB	Warm/Cool White/Neutral/ & RGB
Lumen	549Lm(3000K)	1188Lm(3000K)
CRI	Ra≥75	Ra≥75
Beam angle	15°/45°/60°	15°/45°/60°
Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz
Light Source	Epistar LED Chip	Epistar LED Chip

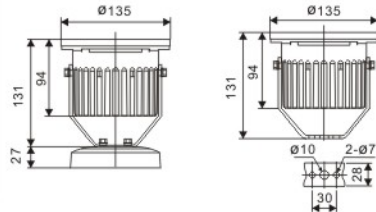

Structure: High pressure die cast aluminum housing. 3mm thickness tempered glass. Optical lens. Silicon waterproof gasket. 304 stainless steel external screw. Remote / Intergral driver.



	HF764W03 HF764W04 HF764W05	HF764W07
Light Source Power	LED 1x5W	LED 7W
Max Power	7W	9W
CCT	Warm/Cool White/Neutral/ & RGB	Warm/Cool White/Neutral/ & RGB
Lumen	345Lm(3000K)	410Lm(3000K)
CRI	Ra≥75	Ra≥80
Beam angle	30°/50°	24°/36°/60°
Adjustable	Fix	Fix
Voltage	220-240V 50/60Hz	220-240V 50/60Hz
Light Source	Cree LED Chip	Philips LED MR16

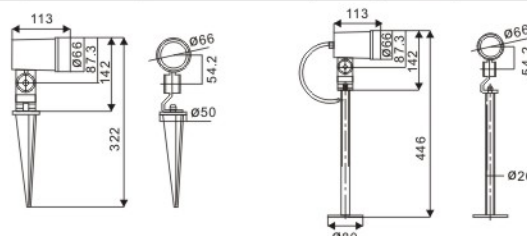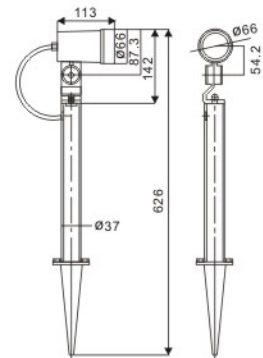

Structure: High pressure die cast aluminum housing. Extruded aluminum pole. 4mm thickness tempered glass. Aluminum spike. Silicon waterproof gasket, 304 stainless steel external screw. Integral driver.