



# Outdoor Lighting


## Recessed Wall Light Series

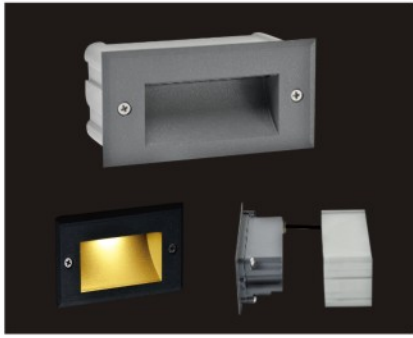


HB321W01	
Light Source Power	LED 24×0.1W
Max. Power	4W
CCT	Warm White/Cool White/Neutral
Lumen	144lm (3000K)
CRI	Ra≥75
Beam angle	/
Adjustable	Fix
Voltage	220-240V 50/60Hz
Light Source	Epistar LED Chip




Dimension

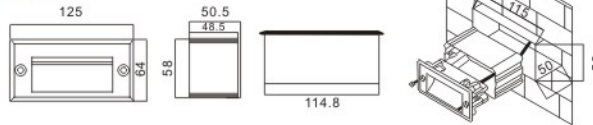



Structure: High pressure die-cast aluminum weatherproof housing and with 3mm thickness tempered glass.

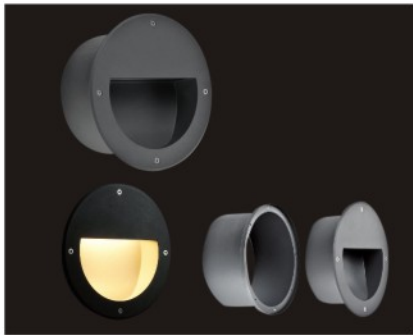

HB415	
Light Source Power	LED 15W
Max. Power	18W
CCT	Warm White/Cool White/Neutral
Lumen	1000lm (3000K)
CRI	Ra≥75
Beam angle	/
Adjustable	Fix
Voltage	220-240V 50/60Hz
Light Source	Cree LED Chip(XTE)




Dimension

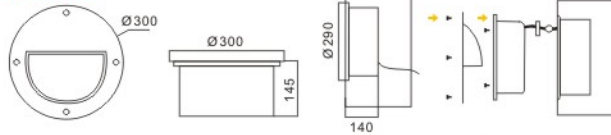



Structure: High pressure die-cast aluminum weatherproof housing and recessed kit. 3mm thickness tempered glass.



HB411	
Rated power	(18W,26W PL-C),70W HQI-E
CCT	Warm/Cool White/Neutral
Lumen	(1200lm=18W),(1800lm=26W), (5200lm=70W)
CRI	Ra≥75
Beam angle	/
Adjustable	Fix
Voltage	220-240V 50/60Hz
Light Source	PL-C, HQI-E




Dimension

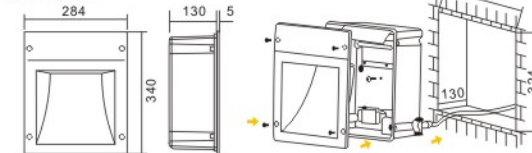


Structure: High pressure die-cast aluminum weatherproof housing, with 3mm thickness tempered glass.



HB467	
Light Source Power	LED 3×1W / 3×2W / 3×3W
Max. Power	4.5W / 8W / 12W
CCT	Warm White/Cool White/Neutral
Lumen	(180lm=4.5W/3000K),(360lm=8W/3000K) (600lm=12W/3000K)
CRI	Ra≥75
Beam angle	/
Voltage	220-240V 50/60Hz
Light Source	Epistar LED Chip



Dimension

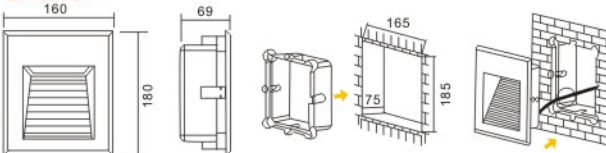

Structure: High pressure die-cast aluminum weatherproof housing, with 3mm thickness tempered glass.