




Wall Light Series

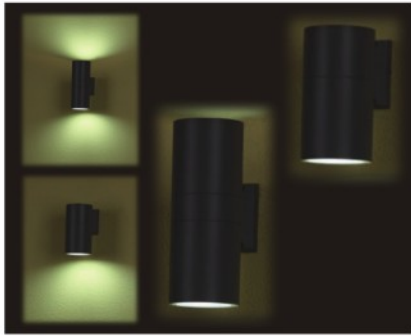


Model NO.	Available lamp
7072(Single Side)	(E27,9W Energy Saving Lamp),(PAR 20,50W)
7073(Single Side)	(E27,13W Energy Saving Lamp),(PAR 30,75W)
7074(Single Side)	(E27,26W Energy Saving Lamp),(PAR 38,80W)
7092(Double Side)	(E27,2×9W Energy Saving Lamp)
7093(Double Side)	(E27,2×13W Energy Saving Lamp)
7094(Double Side)	(E27,2×26W Energy Saving Lamp)

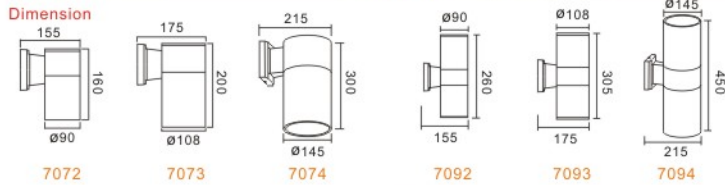

Structure: Extruded aluminum housing and top/base cover tempered glass diffuser. Silicon waterproof gasket.

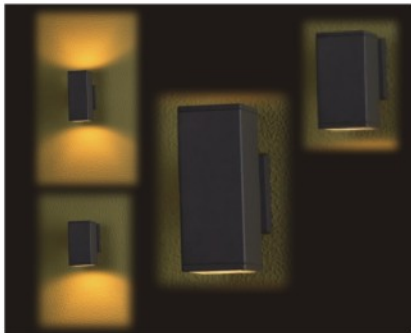



Model NO.	Available lamp
7481(Single Side)	(E27,15W Energy Saving Lamp),(PAR 38,80W)
7471(Single Side)	(E27,9W Energy Saving Lamp),(PAR 20,50W)
7482(Double Side)	(E27,2×15W Energy Saving Lamp),(PAR 38,80W)
7472(Double Side)	(E27,2×9W Energy Saving Lamp),(PAR 20,50W)

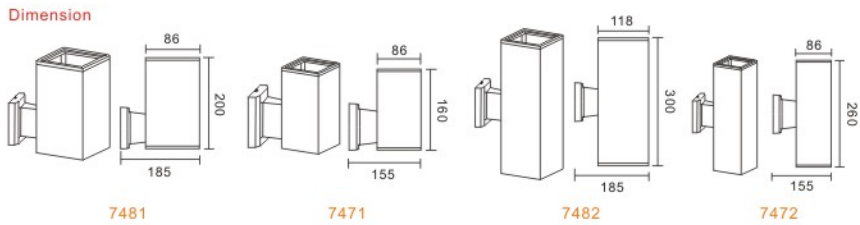


Structure: Extruded aluminum housing and top/base cover tempered glass diffuser. Silicon waterproof gasket.





HB468W01	
Light Source Power	LED 1×10W
Max. Power	12W
CCT	Warm/Cool White/Neutral
Lumen	700lm (3000K)
CRI	Ra≥75
Beam angle	/
Adjustable	Fix
Voltage	220-240V 50/60Hz
Light Source	Epistar LED Chip

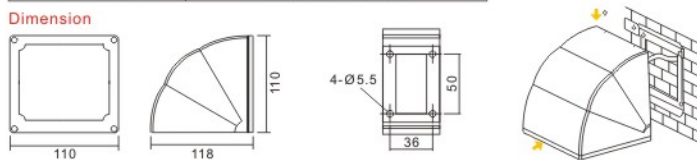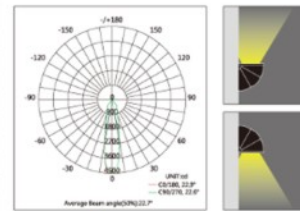

Structure: Extruded aluminum housing and top/base cover 5mm thickness tempered glass. Silicon waterproof gasket.

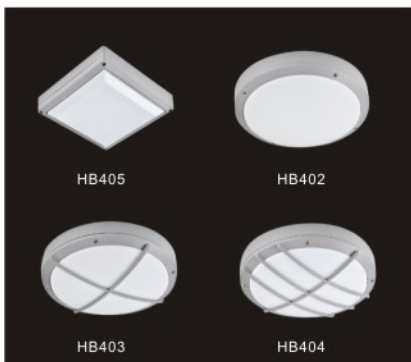

HB402, HB403, HB404, HB405	
Light Source Power	LED 100×0.1W
Max. Power	13W
CCT	Warm/Cool White/Neutral
Lumen	600lm (3000K)
CRI	Ra≥75
Beam angle	120°
Adjustable	Fix
Voltage	220-240V 50/60Hz
Light Source	Epistar LED Chip

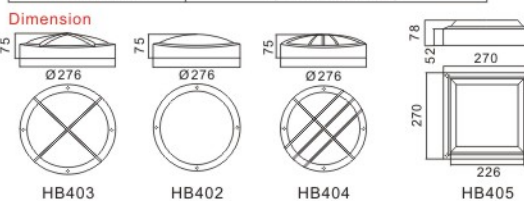

Structure: High pressure die cast aluminum housing. UV stabilized PC. 304stainless steel external screws.