

Indoor Lighting

LED Square Surface Gimbal Down Light (Spot Effect)

Low Power Series




	MZ-067-0325	MZ-010-0327	MZ-118-0329
Light Source Power	LED 6.7W COB Chip	LED 10W COB Chip	LED 12.6W COB Chip
Max.Power	8W	12W	15W
CCT	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Lumen	510/540/680/750Lm	760/792/1071/1130Lm	1200/1350/1430/1540Lm
CRI	Ra80/Ra70	Ra80/Ra70	Ra80/Ra70
Beam angle	24°/32°/45°	24°/32°/45°	24°/32°/45°
Adjustable	Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Current	DC 350mA	DC 550mA	DC 450mA
Dimension	SQ 105×H139mm	SQ 105×H139mm	SQ 105×H139mm




	MZ-067-0326	MZ-010-0328	MZ-118-0330
Light Source Power	LED 2×6.7W COB Chip	LED 2×10W COB Chip	LED 2×12.6W COB Chip
Max.Power	2×8W	2×12W	2×15W
CCT	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Lumen	510/540/680/750Lm	760/792/1071/1130Lm	1200/1350/1430/1540Lm
CRI	Ra80/Ra70	Ra80/Ra70	Ra80/Ra70
Beam angle	24°/32°/45°	24°/32°/45°	24°/32°/45°
Adjustable	Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Current	DC 350mA	DC 550mA	DC 450mA
Dimension	L205×W105×H139mm	L205×W105×H139mm	L205×W105×H139mm

Mid Power Series

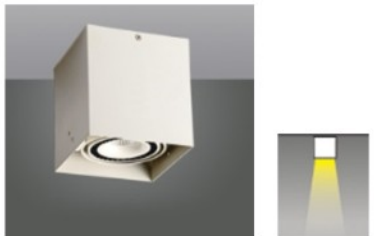

	MZ-067-0326	MZ-010-0328	MZ-118-0330
Light Source Power	LED 12.6W COB Chip	LED 20W COB Chip	LED 26.7W COB Chip
Max.Power	15W	22W	28W
CCT	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Lumen	1200/1350/1430/1540Lm	1700/1840/1980/2140Lm	2010/2100/2230/2320Lm
CRI	Ra80/Ra70	Ra80/Ra70	Ra80/Ra70
Beam angle	24°/32°/45°	24°/32°/50°	24°/32°/50°
Adjustable	Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Current	DC 450mA	DC 600mA	DC 700mA
Dimension	SQ140×H167mm	SQ140×H167mm	SQ140×H167mm

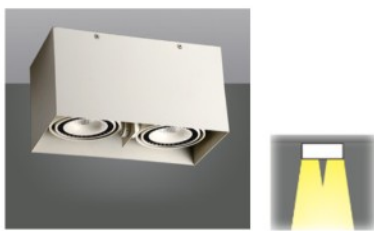

	MZ-118-0116	MZ-018-0118	MZ-267-0120
Light Source Power	LED 2×12.6W COB Chip	LED 2×20W COB Chip	LED 2×26.7W COB Chip
Max.Power	2×15W	2×22W	2×28W
CCT	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Lumen	1200/1350/1430/1540Lm	1700/1840/1980/2140Lm	2010/2100/2230/2320Lm
CRI	Ra80/Ra70	Ra80/Ra70	Ra80/Ra70
Beam angle	24°/32°/45°	24°/32°/50°	24°/32°/50°
Adjustable	Adjustable	Adjustable	Adjustable
Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Current	DC 450mA	DC 600mA	DC 700mA
Dimension	L280×W140×H167mm	L280×W140×H167mm	L280×W140×H167mm