

Outdoor Lighting

PUK (Made in Italy)

Hydrojet Medium LED Landscape spike light **IP66 / EN60598 / CLASS III / CE**





Hydrojet Medium LED

Spike projector for outdoor installation through earth spike. Phosphochromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicon gasket and stainless steel screws built-in LED driver 220-240V,50-60Hz, with 1 CREE CXA 1507 COB LED. IP66 rating.

- *Material: High corrosion resistance die-cast copper-free aluminum body,
- *Coating : polyester powder coating with phosphochromating pre-finish
- *NR.1 x12W COB CREE "CXA 1507" LED
- *Electronic transformer,20V/240V,50/60Hz included, Stainless steel screws,Silicone rubber gasket
- Tempered safety glass, 1mt. neoprene power cable included.

P/N	Light Source	LED Color	Light Beam Angle	Lumen Output	Luminous Efficacy (Lm/W)	Color Options
Hydroject 12W 107006	COB LED	3000K (Warm White)	30 Degree	898lm	74.9	Textured Grey

Hydrojet Mini LED-Surface Mounted Underwater Lighting

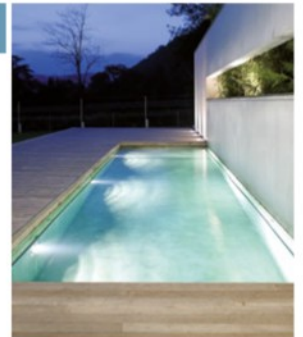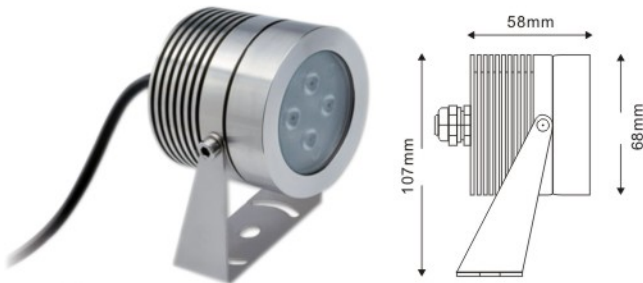

Small underwater projector, surface mounted, completely made in stainless steel AISI 316L, silicon o-rings, 350/500mA remote driver needed, with 4 CREE XP-G2 LED. IP68 Rating .

- *Material: completely made in stainless steel AISI 316L marine grade,
- *Stainless steel AISI 316L marine grade trim. NR.4 x 1.5W CREE "XP-G2" LED
- *Stainless steel screws, Silicon rubber gasket, Tempered safety glass,
- *Protection system IP68 with maximum immersion depth 3mt, M12 cable gland made in stainless steel AISI316
- * 8mt. neoprene power cable included, Adjustable through 200Degree



	LIGHT SOURCE	LED COLOR	LIGHT BEAM OPTIONS	LUMEN OUTPUT (Lm)	LUMINOUS EFFICACY (Lm/w)	COLORS OPTIONS
IP68 / EN60598 / CLASS III / CE 6 WATT P/N:301003 REMOTE DRIVER 350/500 MA NEEDED IP68-3 METERS DEPTH 2.00 KG UNIT GROSS WEIGHT	HIGH-POWER LED	3.000°K WARM-WHTIE	10°	576	96.00	<input type="checkbox"/> STAINLESS STEEL
			30°	548	91.34	
			45°	521	86.84	
		6.000°K COLD-WHTIE	10°	600	100.00	
			30°	570	95.00	
			45°	541.50	90.25	

ther light color available on request: 4000K (Neutral White), Blue Colr