


PUK (Made in Italy)

Hydroscub Mini LED-Recess Underwater Lighting

IP68 / EN60598 / CLASS III / CE

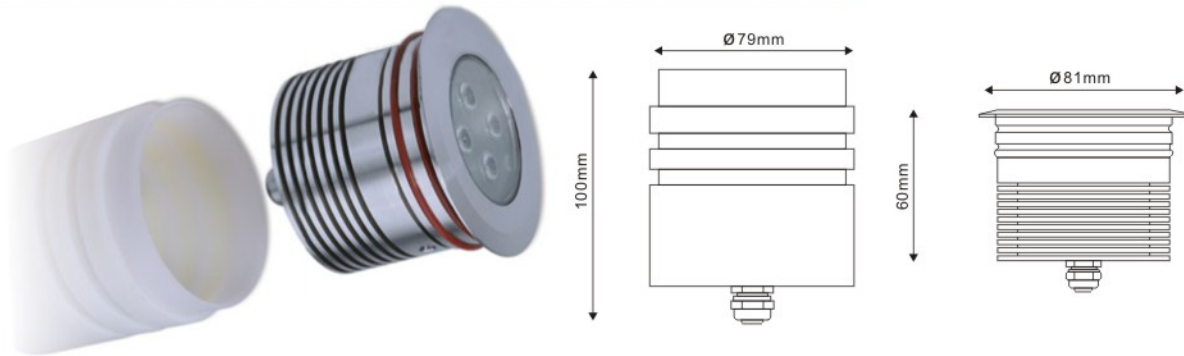

Small underwater luminaire, wall recessed, completely made in stainless steel AISI 316L, silicone o-rings, acetal resin housing for recess. 350/500mA remote driver needed, with 4CREE XP-G2 LED. IP68 rating .

*Material : completely made in stainless steel AISI 316L marine grade,

*Stainless steel screws, Silicon rubber gasket, Tempered safety glass, Protection system IP68 with maximum immersion depth 3mt.

*M12 cable gland made in stainless steel AISI 316, Recess Housing made in acetal resin, cable sheath made in PVC. 8 mt. neoprene power cable include




6 WATT
REMOTE DRIVER 350/500 MA NEEDED
IP68-3 METERS DEPTH
2.00 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR	LIGHT BEAM OPTIONS	LUMEN OUTPUT (Lm)	LUMINOUS EFFICACY (Lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHTIE	10°	576	96.00	STAINLESS STEEL
		30°	548	91.34	
		45°	521	86.84	
	6.000°K COLD-WHTIE	10°	600	100.00	
		30°	570	95.00	
		45°	541.50	90.25	

*OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4.000°K NEUTRAL-WHITE, ● BULE

Hydro Blade & Hydro Step Outdoor step light fitting

IP65 / EN60598 / CLASS III / CE

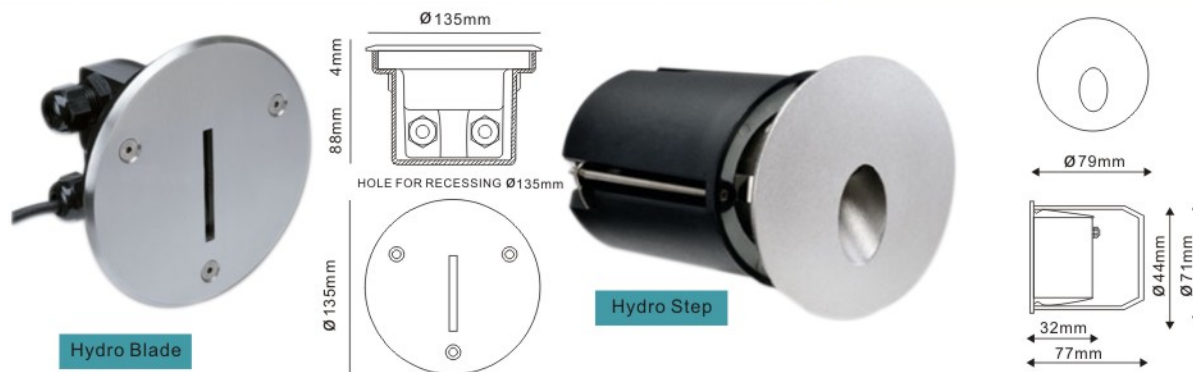

Recessed round steplight for outdoor installation in the wall, phospho-chromatised and polyester powder coated die-cast copper free aluminium body and frame, tempered safety glass, moulded silicon gasket and stainless steel screws. Build-in LED driver 220-240V 50-60Hz, with 1 high-power CREE LED. IP65 rating.

*Material : High corrosion resistance die-cast copper-free aluminum body, polyester powder coating with phosphochromating, pre-finish.

*NR.1x1W CREE LED,Electronic transformer 220/240V,50/60Hz included,Stainless steel screws,

Silicon rubber gasket,

*Protection against impact IK09 (10 joule),polypropilene recessing box included, 0.2mt. neoprene power cable included.

P/N:	Light Source	LED Color	Light Beam Options	Lumen Output(lm)	Luminous Efficacy(Lm/W)	Color Options
Hydro Blade 2watt	High-power LED	3000K	Spot Directional	96	48	Stainless Steel
		6000K		100	50	
Hydro Step 1watt	High-power LED	3000K	80Degree Asymmetrical	60	60	Textured Grey

***Other Light Color available on request: 4000K (Neutral White), Blue