

BOLLARD LIGHT




LUMINAIRES SPECIFICATIONS

Model No.	ECCO C13A LED -H50B (12W) ECCO C13A LED -H80B (12W)
Fitting Material	High pressure die cast aluminum housing with anti-ageing electrostatic spray processing. PMMA diffuser, silicon waterproof gasket, 304 stainless steel external screw.
Ingress Protection	IP65
Input Voltage	AC100-240V
Power Frequency	50/60Hz
Diffuser Cover	PMMA Diffuser
Finishing	Anti-ageing electrostatic spray finishing
Beam Angle	360°
Dimension	As shown photo (mm)
Power Supply	Integral Electronic Driver

APPLICATION


Landscaping areas, building perimeters, gardens, parks, and walkways etc...

Dimension

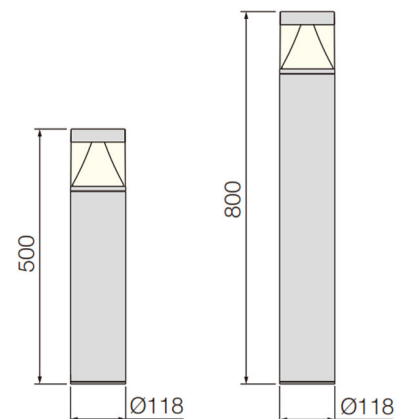

LAMP SPECIFICATIONS

Color Temperature	3000K, 4000K, 6000K
Light Source	Epistar LED chip
Color Rendering Index	Ra ≥ 75
Lumen	12W - 800lm

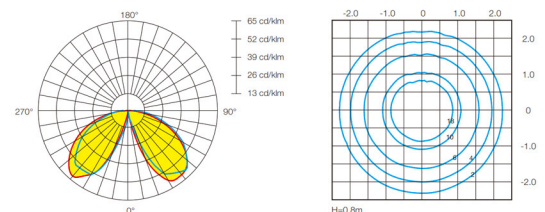

ZEN ILLUMINATION PTE LTD

3 Ang Mo Kio Street 62, #03-23/24 LINK @ AMK, Singapore 569139

Tel : (65) 6287 7718, Fax : (65) 6383 1108, enquiry@zen-illumination.com, www.zen-illumination.com