



LED LINEAR LIGHT FITTING


WSD-BLZ4

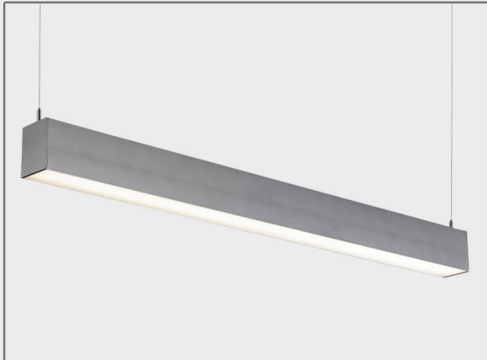

Suspension Kit



Surface Kit



CE ROHS IP20




LUMINAIRES SPECIFICATIONS

Fitting Material	Die-cast Aluminium Housing with epoxy powder coating finished, opal diffuser and stainless steel clip.
Ingress Protection	IP20
Input Voltage	AC220-240V
Power Frequency	50/60Hz
Optical Cover	Opal Diffuser
Beam Angle	120°
Dimension	As shown photo (mm)
Power Supply	Electronic ballast

APPLICATION

Parking areas, Loading/ Unloading bays, Industrial areas, Factories etc..

Dimension

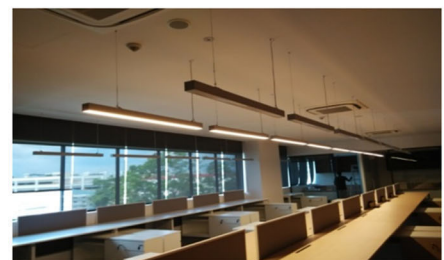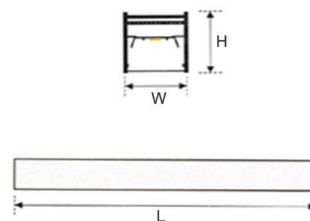

LED LINEAR LIGHT	Power	Lumen	Dimension H x W x L	CCT
ECCO WSD-BLZ4A1	16W LED	1440	65mm x 63mm x 610mm	3000K / 4000K / 5000K
ECCO WSD-BLZ4A2	32W LED	2880	65mm x 63mm x 1210mm	3000K / 4000K / 5000K
ECCO WSD-BLZ4A3	40W LED	3600	65mm x 63mm x 1510mm	3000K / 4000K / 5000K

ZEN ILLUMINATION PTE LTD

3 Ang Mo Kio Street 62, #03-23/24 LINK @ AMK, Singapore 569139

Tel : (65) 6287 7718, Fax : (65) 6383 1108, enquiry@zen-illumination.com, www.zen-illumination.com